

**Canon**



**imageFORMULA  
DR-M160II**

**A HIGH-SPEED,  
HIGH-VOLUME SCANNER  
THAT'S BUILT TO LAST**



This sturdily built scanner with highly durable moving parts sits comfortably on any desktop to provide super-fast, high-capacity scanning.

Reliable

60 ppm



**Win&Mac  
Hybrid**



## The DR-M160II is a rapid and reliable solution to all kinds of scanning needs.

With its highly reliable feeding mechanism and robust body, the DR-M160II delivers high-speed one-pass duplex scanning at 60ppm/120ipm in both color and black & white.

The high-capacity ADF ensures that it can make quick work of a large volume of documents.

In short, this is an extremely versatile desktop scanner.


### Comfortable high-performance scanning

#### ■ Sturdy, compact, durable body

Inside the sturdy body, which is compact enough to sit comfortably on your desktop, the moving parts of the feed path, tray and upper unit have been rendered even more durable. It's designed to stay on top of high-volume scanning needs in a variety of business settings.

#### ■ User-friendly operation panel

Start and stop scanning and perform other operations away from your computer with the operating panel.



#### ■ High-volume ADF

The heavy-duty Auto Document Feeder can hold up to 60 sheets.

#### ■ Super-fast scanning

High-speed one-pass duplex scanning at 60ppm /120ipm allows efficient scanning of large volumes of documents. Highly reliable document handling is assured by means of a high-performance feed roller. It can handle all kinds of input from thick or thin documents to multi-sheet forms, checks, embossed cards, and even A3/11" x 17" folio.

	Simplex (ppm)		Duplex (ipm)	
	B&W/Grayscale	Color	B&W/Grayscale	Color
200dpi	60	60	120	120
300dpi	60	50	120	100

\*Windows, A4, Portrait


 **imageFORMULA  
DR-M160II**



## Reliable feeding mechanism supported by solid technology

### Reliable document feeding

Canon's reliable page separation mechanism provides smooth feeding of a wide variety of document sizes and weights. The DR-M160II also uses a new feed roller for even better paper feeding. Features such as Ultrasonic Double Feed Detection and Rapid Recovery further ensure dependability by making sure each and every page of a batch is scanned.



### If a double feed is detected, the Retry and DFR functions allow scanning to resume.


If a double feed is detected at the feeder inlet, engaging the Retry Function automatically reverses the path of the document so that it can be fed again and rescanned. Also, if a document has something like a photo or a tag stuck to it, scanning can be resumed either by selecting the DFR (Double Feed Release) in the double feed confirmation dialogue on the screen, or by pressing the DFR button on the main unit to indicate that it is not a case of double feed.

*\* DFR is only available in Continuous Scanning mode and if Double Feed Detection is set up.*


## Various Image Processing Options

### Batch Separation Using a Blank Sheet


For batch separation, insert a blank sheet. This will be recognized as a batch separator, and the file will be automatically divided.

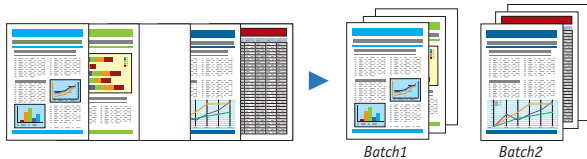

### Advanced Text Enhancement




### Auto Size Detection




### Skip Blank Page



### Folio Mode



### Deskew



## BUNDLED SOFTWARE

### CapturePerfect

### Capture Perfect

CapturePerfect is Canon's own scanning application that makes it easy to get great scans straight out of the box. Through a user-friendly interface, the software gives you a wide selection of file-saving formats and file distribution options, such as searchable and encrypted PDF, Scan to Mail, Scan to Folder, and more.



### CaptureOnTouch

### Capture OnTouch

CaptureOnTouch is dedicated software for the DR series that makes it easier to perform scanning jobs. Two scanning modes are available, "Scan First" and "Select Scan Job."

### Programmable scan jobs

Up to nine routine scan tasks can be registered as jobs, which can be accessed directly from the DR-M160II's operating panel. The LED display shows the currently selected job number (1 to 9), and the Job Select key is used to scroll through them for easy push button access to frequently-used scan functions and settings.

## Other Software



eCopy PDF Pro Office instantly creates 100% industry-standard, universally viewable PDFs files, and converts static PDF documents into editable files and useful information. eCopy PDF Pro Office allows you to attain the flexibility of a universal document format for higher productivity and seamless information exchange.



**Kofax**  
**VirtualReScan Basic**

Leading image processing software, Kofax VRS Basic, improves readability of multiple-size documents with varying degrees of quality. Automatically straighten skewed pages without character degradation, optimize a document's brightness/contrast levels, and eliminate background noise and speckling.

## DR-M160II Specifications

Type		Desktop sheet-fed scanner
Document size	Plain paper	Width: 54 mm to 216 mm (2.12" to 8.5") Length: 50.8 mm to 356 mm (2" to 14") (You can scan documents up to 3,000 mm (118.1") long by setting the scanner to the Long Document mode.)
	Business card	Width: 50.8 mm to 55 mm (2" to 2.17") Length: 85 mm to 91 mm (3.35" to 3.58")
	Card	54 mm x 86 mm (2.1" x 3.4") (ISO standard)
Document thickness and weight	Plain paper	Page separation: 0.04 mm to 0.25 mm (0.00157" to 0.00984") 27 to 209 g/m <sup>2</sup> (7 to 56 lb bond) Bypass: 0.04 mm to 0.3 mm (0.00157" to 0.0118") 27 to 255 g/m <sup>2</sup> (7 to 68 lb bond)
	Business card	380 g/m <sup>2</sup> (80 lb bond) 0.15 mm (0.0059") or smaller
	Card	0.76 mm (0.03") or less Up to 1.4 mm (0.055") for embossed cards
Document feeding method		Automatic
Scanning sensor		Contact image sensor
Light source		LED
Scanning side		Simplex/Duplex
Scanning modes		Black and White, Error Diffusion, 256-level Grayscale, Advanced Text Enhancement, Advanced Text Enhancement II, 24-bit Color
Scanning resolution		150 x 150 dpi/200 x 200 dpi/240 x 240 dpi/300 x 300 dpi/400 x 400 dpi/600 x 600 dpi
Scanning speed	B&W/Grayscale	200 dpi/300 dpi: 60 ppm (Simplex), 120 ipm (Duplex)
	Color	200 dpi: 60 ppm (Simplex), 120 ipm (Duplex) 300 dpi: 50 ppm (Simplex), 100 ipm (Duplex)
Interface		Hi-Speed USB 2.0
Scanner driver/Software		Windows: ISIS/TWAIN Driver, CaptureOnTouch, CapturePerfect, eCopy PDF Pro Office, Kofax VirtualReScan Basic
		Mac: TWAIN Driver, CaptureOnTouch
Other functions		Folio scanning, Double feed detection release, Separation retry
Dimensions (W x D x H)	With the feed tray removed and the document eject tray closed	280 mm (11.02") x 172 mm (6.77") x 178 mm (7.01")
	With the feed tray attached and the document eject tray open	280 mm (11.02") x 606 mm (23.86") x 366.4 mm (14.43")
Weight (without AC adapter)		Approximately 3.2 kg (7.05 lb)
Power supply (using AC adapter)		DC24V 1.0A
Power consumption		Scanning: 27 W or less In the sleep mode: 1.8 W or less With power switch OFF: 0.5 W or less
Operating environment	Temperature	10°C to 32.5°C (50°F to 90.5°F)
	Humidity	20% to 80% RH
Options/Consumables		Flatbed Scanner Unit 101/201, WU10, Barcode Module, 2D code Module, Exchange Roller Kit (feed roller and retard roller)

\*1 Actual scanning speed may vary depending on your system configuration and PC. Specifications are subject to change without notice.

Canon and the Canon logo are registered trademarks of Canon Inc. in the United States and may also be trademarks or registered trademarks in other countries. imageFORMULA is a trademark of CANON ELECTRONICS INC. Microsoft, Windows and SharePoint are registered trademarks of Microsoft Corporation in the United States and other countries. Apple and OS X are registered trademarks of Apple Inc. in the United States and other countries. Other product and company names herein may be the trademarks of their respective owners. Adobe, the Adobe logo, Acrobat, the Adobe PDF logo, and Adobe Reader are either registered trademarks or trademarks of Adobe Systems Incorporated in the United States and/or other countries. Kofax, the Kofax logo, and other Kofax marks are registered trademarks or trademarks of Kofax, Inc. in the United States and other countries, and used under authority from Kofax.

Powered by  
**ADOBE® PDF LIBRARY**



ENERGY STAR and the ENERGY STAR mark are registered U.S. trademarks.



# Canon

**CANON ELECTRONICS INC.**

3-5-10, Shibakouen, Minato-ku, Tokyo 105-0011, JAPAN  
[www.canon-elec.co.jp](http://www.canon-elec.co.jp)

**CANON U.S.A. INC.**  
New York Office/Headquarters: One Canon Park, Melville, NY 11747, U.S.A.  
**CANON CANADA, INC.**  
Toronto Office/Headquarters: 6390 Dixie Road, Mississauga, Ontario L5T 1P7, Canada  
**CANON EUROPA N.V.**  
Bovenkerkerweg 59, 1185 XB Amstelveen, The Netherlands  
**CANON LATIN AMERICA, INC.**  
One Canon Park, Melville, NY 11747, U.S.A.  
**CANON AUSTRALIA PTY. LTD.**  
Building A, The Park Estate, 5 Talavera Road, Macquarie Park, NSW 2113, Australia  
**CANON NEW ZEALAND LTD.**  
Akoranga Business Park, Akoranga Drive, Northcote, Auckland, New Zealand

**CANON SINGAPORE PTE. LTD.**  
1 Harbour Front Avenue, #04-01 Keppel Bay Tower, Singapore 098632  
**CANON HONGKONG COMPANY LTD.**  
19th Floor, The Metropolis Tower, 10 Metropolis Drive, Hung Hom, Kowloon, Hong Kong  
**CANON (CHINA) CO., LTD.**  
15F South Tower, Beijing Kerry Centre, 1 Guang Hua Road, Chao Yang District, Beijing 100020, China  
**CANON KOREA BUSINESS SOLUTIONS INC.**  
BS Tower, 607 Teheran-ro, Gangnam-gu, Seoul, Korea  
**CANON INDIA PVT. LTD.**  
7th Floor, Tower B DLF Cyber Terraces DLF Phase III Gurgaon - 122002 Haryana, India

PUB. 0185W445

\*\*\*\*\*

© CANON ELECTRONICS INC. 2014

PRINTED IN JAPAN  
IMPRIMÉ AU JAPON